

# gx 2 specs



## Power to respond

The gx 2 couples the power of the pro range with the most powerful GPU, for unparalleled generative content capacity.

## Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty (plus options to extend warranty length)


## Bundled accessories

Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide + Manual, Backmounted Rails.

## Physical specifications

<b>Packed Dimensions:</b>	<b>W</b> 711mm 28"	<b>H</b> 508mm 20"	<b>D</b> 737mm 29"
<b>Unit Dimensions:</b>	<b>W</b> 445mm 17.52"	<b>H</b> 178mm 7"	<b>D</b> 593mm 23.35"
<b>Unit + Rack Handles</b>			<b>D</b> 621mm 24.45"
<b>Rack Depth:</b>			<b>D</b> 585mm 23.03"
<b>Unit Weight:</b>		16.8kg	37lbs
<b>Packed Unit Weight:</b>		24.9kg	54.9lbs

# gx 2 specs

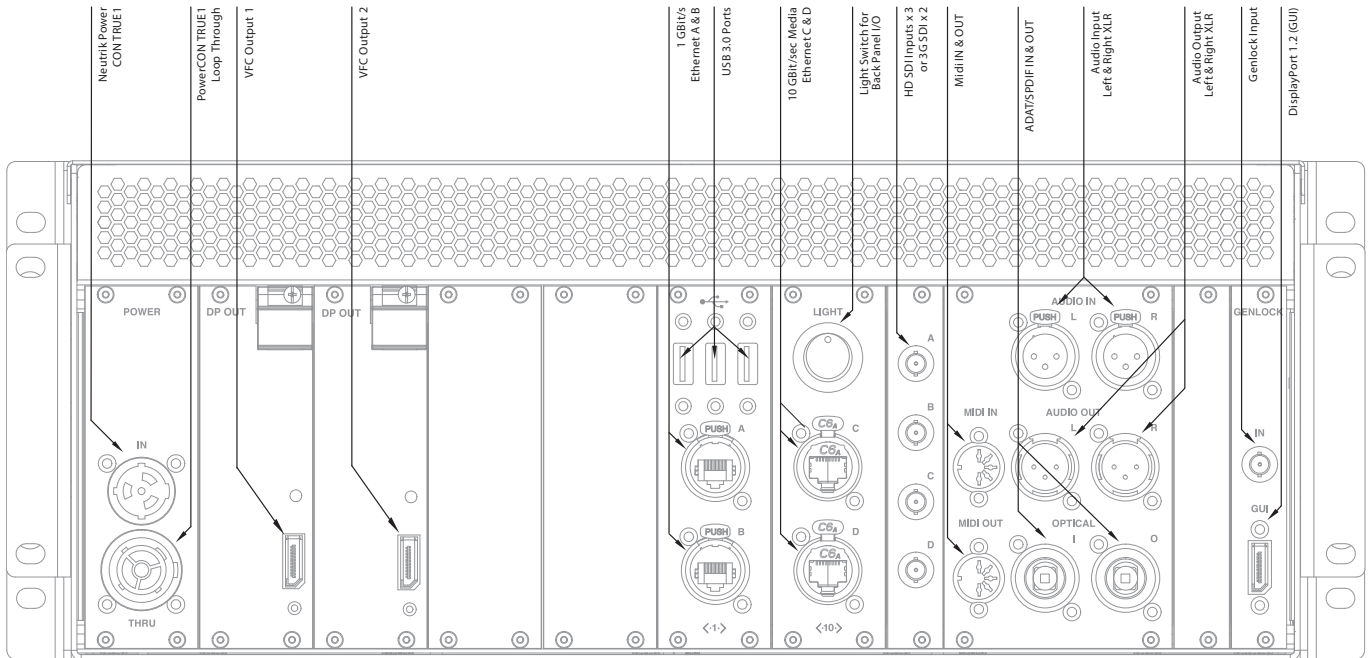

## Hardware specifications

**Voltage:** 100-240V, 50-60Hz

**Power Consumption:**

560VA @ 240V, 50Hz (max)

**Operating System:** Windows 10 IoT

Enterprise LTSCB

**CPU:** Xeon Quad-Core 3.7Ghz

**Memory:** 16GB DDR4 RAM

**Environmental Tolerances:**

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

**Mounting System:**

4U 19" rack mount

**Audio:** RME Professional

**Storage:** 2× 80GB SSD

(Internal System Drive, Restore Drive)

2TB SSD

## System connectivity I/O

**Video Output:**

1× DisplayPort 1.2 (GUI)

2× VFC Output Slots

Ships standard with DisplayPort 1.2 VFC cards (4096 × 2160 max)

Different Video Format Conversions cards also available, refer to VFC Specifications

**Video Input:**

4× HD-SDI or 2 × 3G-SDI

**Analogue Audio:**

2× Balanced XLR Output

2× Balanced XLR Input

1× 1/4" Headphones Jack

**Digital Audio:** ADAT/SPDIF I/O

**MIDI:** 1× In, 1× Out

**General Network:** 1× Gigabit LAN

**Artnet:** 1× Gigabit LAN

**Media Network:** 2× 10Gb/sec LAN

**Data/Peripherals:**

5× USB 3.0

**Video Sync:** BNC Genlock