

gx 2c specs



think fast.

The gx 2c features even more GPU processing power, more capture, more storage, as well as 10-bit and HDR support to match your creative demands.

Warranties & Support

- 2 year return to base hardware warranty (plus options to extend warranty length)

Bundled accessories

Keyboard, Mouse & Pad, Power Cable (Plug-True1), Power Daisy Chain (True1-True1), Active DP to DVI adapter, Getting Started Guide + Manual, Backmounted Rails.

Software

- disguise full production suite
- Notch Playback License (2 years)

Physical specifications


| | | | |
|----------------------------|----------------------------|-----------------|---------------------|
| Packed Dimensions: | W | H | D |
| | 711mm 28" | 508mm 20" | 737mm 29" |
| Unit Dimensions: | W | H | D |
| | 445mm 17.52" | 178mm 7" | 593mm 23.35" |
| Unit + Rack Handles | W | D | |
| | 483mm 19" | 621mm 24.45" | |
| Rack Depth: | D | | |
| | 585mm 23.03" | | |
| Unit Weight: | EST. 16.8kg | | 37lbs |
| | Packed Unit Weight: | | EST. 24.9kg 54.9lbs |

Upgrades

(AS - At Sale, F - Field, RTM- Return to Manufacturer)

- Storage Upgrade 8TB ^{AS, RTM}
- Storage Upgrade 16TB ^{AS, RTM}

gx 2c specs

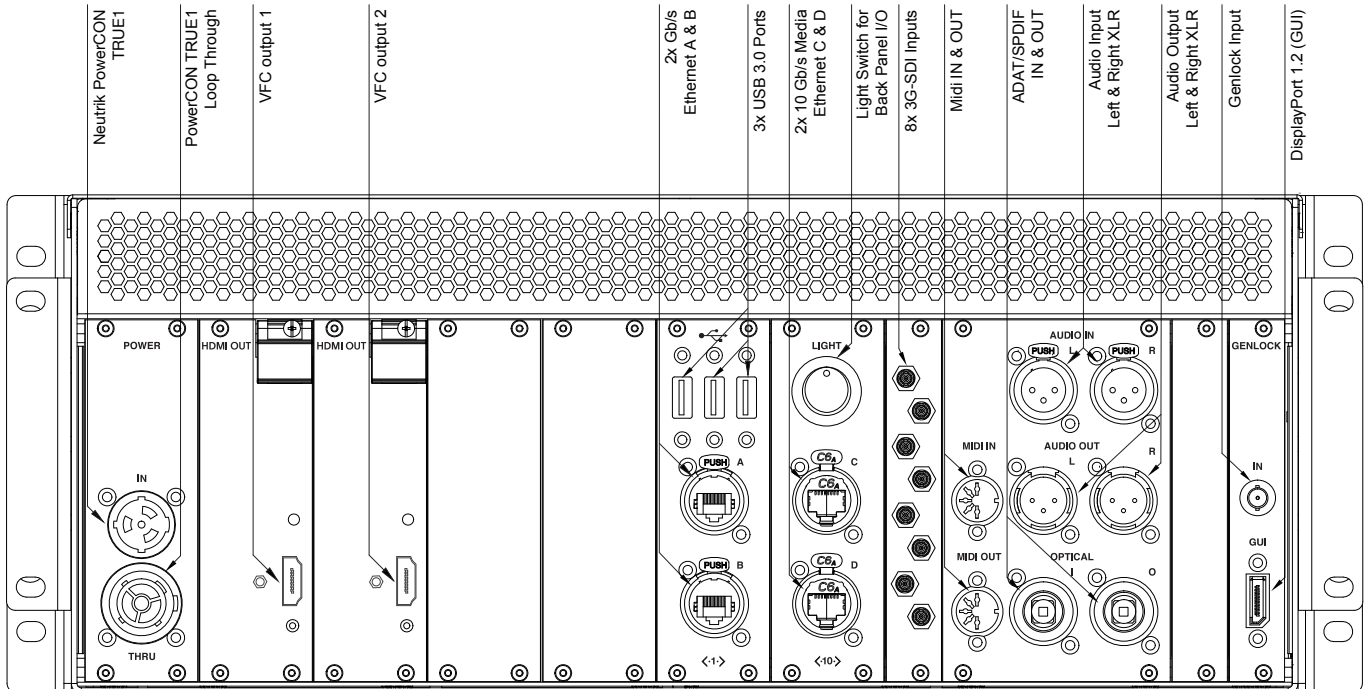

Hardware specifications

Voltage: 100-240V, 50-60Hz

Power Consumption:

720VA @ 240V, 50Hz (max)

Operating System:

Windows Enterprise SAC

CPU: Intel® Xeon® Quad-Core 3.7Ghz

Memory: 64GB DDR4 RAM

Environmental Tolerances:

Temperature: 5-35°C (40°-95°F)

Humidity: 5%-95% (non-condensing)

Altitude: 0-8850 ft (0-2700m)

Mounting System:

4U 19" rack mount

Audio: RME Professional

OS: 2× 80GB SSD

(Internal System Drive, Restore Drive)

Storage: 4TB SSD

System connectivity I/O

Video Output:

1× DisplayPort 1.2 (GUI)

2× VFC Output Slots

Ships standard with HDMI 2.0 VFC cards

Different Video Format Conversions cards also available, refer to VFC Specifications

Video Input:

8× 3G-SDI or 2× 2160p (Quad Split)
(HD-BNC connectors)

Analogue Audio:

2× Balanced XLR Output

2× Balanced XLR Input

1× 1/4" Headphones Jack

Digital Audio: ADAT/SPDIF I/O

MIDI: 1× In, 1× Out

General Network: 1× Gigabit LAN

Artnet: 1× Gigabit LAN

Media Network: 2× 10Gb/sec LAN

Data/Peripherals:

5× USB 3.0

Video Sync: BNC Genlock